

小型交流减速电机 SMALL AC GEAR MOTOR

各国电压表/COUNTRIES VOLTAGE

国名 Country	频率 Frequency	单相 1-Phase	三相 3-Phase	国名 Country	频率 Frequency	单相 1-Phase	三相 3-Phase
中国 China	50	220	220/380	日本 Japan	50/60	100/200	200
澳洲 Australia	50	240	240/415	科威特 Kuwait	50	100/200	200
奥地利 Austria	50	220	220/380	黎巴嫩 Lebanon	50	100/200	230/380
孟加拉 Bangladesh	50	230	230/400	马来西亚 Malaysia	50	115/240	240/415 400/440
比利时 Belgium	50	127/220	220/380	荷兰 Netherlands	50	110/220	220/230
巴西 Brazil	50 60	110/220 127	220/380	新西兰 New Zealand	50	230	230/400
缅甸 Burma	50	230	230/440	巴勒斯坦 Pakistan	50	230	220/380 230/400
高棉 Cambodia	50	120	220/380	沙乌地阿拉伯 Saudi-arabia	50 60	127/220	110/220 127
智利 Chile	50	220	220/380	叙利亚 Syria	50	115/200	220/380
阿根廷 Argentina	50	220	220/380	新加坡 Singapore	50	115/230	230/240
捷克 Czechoslovakia	50	120/220	220/380	南非 South-africa	50	220/230	110/220 127
丹麦 Denmark	50	220	220/380	西班牙 Spain	50	127/220	220/380
埃及 Egypt	50	220	220/380	瑞士 Switzerland	50	220	50
芬兰 Finland	50	220	220/380	泰国 Thailand	50	110/220	220/380
法国 France	50	115/127/220	220/380	土耳其 Turkey	50	127/220/230	220/380
德国 Germany	50	110/220	220/380	英国 U.K.	50	240	240/415
希腊 Greece	50	220	220/380	越南 Viet-Num	50	127/220	220/380
香港 Hong Kong	50	110/200/230	220/380	加拿大 Canada	50	110/120	220/240/480
匈牙利 Hungary	50	220	220/380	哥伦比亚 Hungary	50	110/220	220/380
冰岛 Iceland	50	50	220/380	古巴 Cuba	50	115/120	240
印度 India	50	230	220/380 230/400	厄瓜多尔 Ecuador	50	120/127	208/220
印尼 Indonesia	50	125/220	220/380	韩国 Korea	50	100/200	220
伊拉克 Iraq	50	220	220/380	秘鲁 Peru	50	110/220	220
以色列 Israel	50	230	230/400	菲律宾 Philippines	50	110/220	220/440
意大利 Italy	50	127/220	220/380	美国 U.S.A	50	120/240	240/480



齿轮减速电机 GEAR SPEED REDUCERS

AMH 卧式齿轮减速机/AHM Horizontal Gear Speed Reducers


型号说明
AMH - 345 - 5 - 60

AMH 卧式加马达型

出力轴 45mm

马力 5HP 3.7KW

减速比 1:60

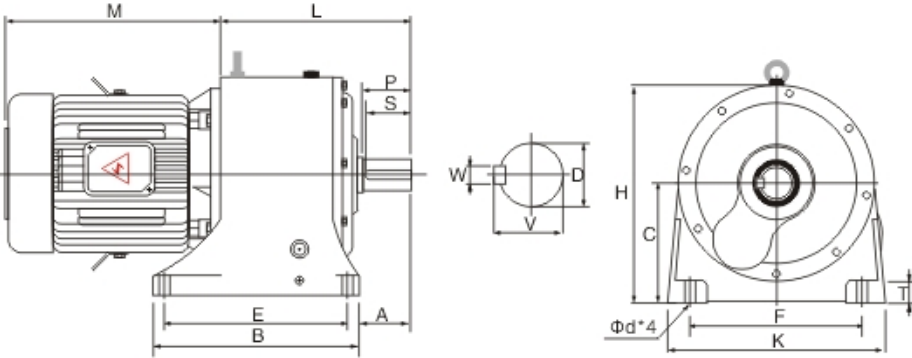

尺寸表 Size Table

单位: mm


速比	HP-4P	型号	A	B	C	E	F	H	K	L	M	T	d	轴 端				
														D	P	S	V	W
4~10	1/4-1/2	AMH 125	67	170	110	140	130	200	180	165	190-210	18	13	25	50	45	28	7
	1-2	AMH 230	85	200	120	170	150	225	200	210	245-300	21	15	30	60	55	33	7
	3	AMH 235	95	250	140	210	180	255	240	235	321	30	15	35	65	60	38.5	10
	5	AMH 340	106	265	155	225	215	305	270	250	337	25	15	40	70	65	43.5	10
	7.5	AMH 345	110	310	175	270	250	325	310	285	356	32	15	45	75	70	48.5	12
	10	AMH 450	135	350	205	300	270	390	350	320	380	36	18	50	85	80	53.5	12
	15	AMH 460	135	380	240	330	320	415	390	330	494	40	18	60	90	85	63.5	15
	20	AMH 570	120	440	265	380	340	485	475	380	538	45	21	70	105	100	74.5	18
11~30	1/4-1/2	AMH 125	67	170	110	140	130	200	180	165	190-210	18	13	25	50	45	28	7
	1	AMH 230	85	200	120	170	150	225	200	210	245	21	15	30	60	55	33	7
	2	AMH 235	95	250	140	210	180	255	240	235	300	30	15	35	65	60	38.5	10
	3	AMH 340	106	265	155	225	215	305	270	250	321	25	15	40	70	65	43.5	10
	5	AMH 345	110	310	175	270	250	325	310	285	337	32	15	45	75	70	48.5	12
	7.5	AMH 450	135	350	205	300	270	390	350	320	356	36	18	50	85	80	53.5	12
	10	AMH 460	135	380	240	330	320	415	390	330	380	40	18	60	90	85	63.5	15
	15	AMH 570	120	440	265	380	340	485	475	380	494	45	21	70	105	100	74.5	18
31~60	1/4-1/2	AMH 125	67	170	110	140	130	200	180	185	190-210	18	13	25	50	45	28	7
	1	AMH 230	80	200	120	170	150	225	200	235	245	21	15	30	60	55	33	7
	2	AMH 235	100	250	140	210	180	255	240	265	300	25	15	35	65	60	38.5	10
	3	AMH 340	106	265	155	225	215	305	270	285	321	25	15	40	70	65	43.5	10
	5	AMH 345	110	310	180	270	250	325	310	325	337	32	15	45	75	70	48.5	12
	7.5	AMH 450	131	350	210	300	270	390	350	340	356	36	18	50	85	80	53.5	12
	10	AMH 460	130	380	240	330	320	415	390	350	380	40	18	60	90	85	63.5	15
	15	AMH 570	120	440	265	380	340	485	475	445	494	45	21	70	105	100	74.5	18
61~100	1/4	AMH 125	67	170	110	140	130	200	180	185	190	18	13	25	50	45	28	7
	1/2	AMH 230	80	200	120	170	150	225	200	235	210	21	15	30	60	55	33	7
	1	AMH 235	100	250	140	210	180	255	240	265	245	25	15	35	65	60	38.5	10
	2	AMH 340	106	265	155	225	215	305	270	285	300	25	15	40	70	65	43.5	10
	3	AMH 345	110	310	180	270	250	325	310	325	321	32	15	45	75	70	48.5	12
	5	AMH 450	131	350	210	300	270	390	350	340	337	36	18	50	85	80	53.5	12
	7.5	AMH 460	130	380	240	330	320	415	390	350	356	40	18	60	90	85	63.5	15
	10	AMH 570	120	440	265	380	340	485	475	445	380	45	21	70	105	100	74.5	18
110~180	1/4	AMH 230	80	200	120	170	150	225	200	235	190	21	15	30	60	55	33	7
	1/2	AMH 235	100	250	140	210	180	255	240	265	210	25	15	35	65	60	38.5	10
	1	AMH 340	106	265	155	225	215	305	270	285	245	25	15	40	70	65	43.5	10
	2	AMH 345	110	310	180	270	250	325	310	325	300	32	15	45	75	70	48.5	12
	3	AMH 450	131	350	210	300	270	390	350	340	321	36	18	50	85	80	53.5	12
	5	AMH 460	130	380	240	330	320	415	390	350	337	40	18	60	90	85	63.5	15
	7.5	AMH 570	120	440	265	380	340	485	475	445	356	45	21	70	105	100	74.5	18
	10	AMH 570	120	440	265	380	340	485	475	445	356	45	21	70	105	100	74.5	18

齿轮减速机 GEAR SPEED REDUCERS

AMV 立式齿轮减速机/AMV Vertical Gear Speed Reducers

型号说明
AMV - 345 - 5 - 60

AMV 立式加马达型
出力轴 45mm
马力5HP 3.7Kw
减速比 1..60

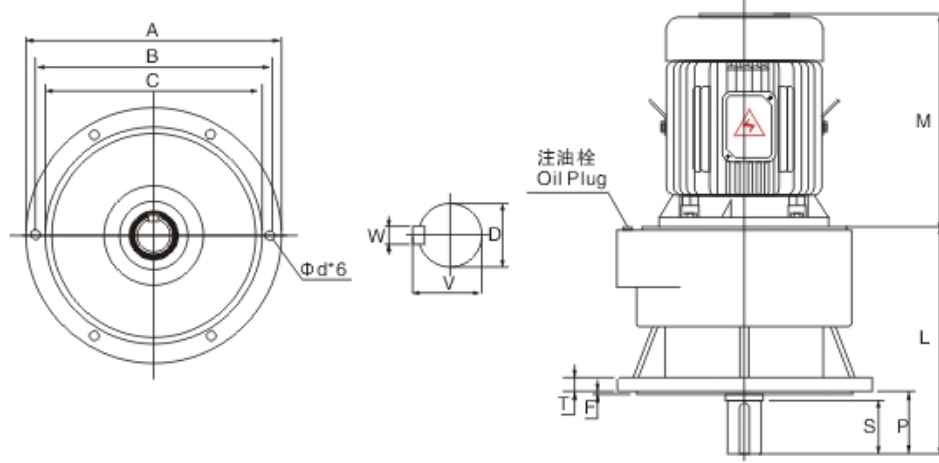

尺寸表 Size Table

单位: mm


速比	HP-4P	型号	A	B	C	F	L	M	P	T	d	轴 端			
												D	S	V	W
4~10	1/4-1/2	AMV 125	210	190	170	5	165	190-210	55	10	13	25	45	28	7
	1-2	AMV 230	250	225	200	5	210	245-300	65	12	14	30	55	33	7
	3	AMV 235	280	255	230	5	235	321	70	13	15	35	60	38.5	10
	5	AMV 340	310	280	250	5	250	337	75	15	15	40	65	43.5	10
	7.5	AMV 345	350	320	290	5	285	356	80	15	15	45	70	48.5	12
	10	AMV 450	400	370	340	5	320	380	90	17	18	50	80	53.5	12
	15	AMV 460	450	410	380	5	330	494	95	18	18	60	85	63.5	15
11~30	1/4-1/2	AMV 125	210	190	170	5	165	190-210	55	10	13	25	45	28	7
	1	AMV 230	250	225	200	5	210	245	65	12	14	30	55	33	7
	2	AMV 235	280	255	230	5	235	300	70	13	15	35	60	38.5	10
	3	AMV 340	310	280	250	5	250	321	75	15	15	40	65	43.5	10
	5	AMV 345	350	320	290	5	285	337	80	15	15	45	70	48.5	12
	7.5	AMV 450	400	370	340	5	320	356	90	17	18	50	80	53.5	12
	10	AMV 460	450	410	380	5	330	380	95	18	18	60	85	63.5	15
31~60	1/4-1/2	AMV 125	210	190	170	5	185	190-210	55	10	13	25	45	28	7
	1	AMV 230	250	225	200	5	235	245	65	12	14	30	55	33	7
	2	AMV 235	280	255	230	5	265	300	70	13	15	35	60	38.5	10
	3	AMV 340	310	280	250	5	285	321	75	15	15	40	65	43.5	10
	5	AMV 345	350	320	290	5	325	337	80	15	15	45	70	48.5	12
	7.5	AMV 450	400	370	340	5	360	356	90	17	18	50	80	53.5	12
	10	AMV 460	450	410	380	5	370	380	95	18	18	60	85	63.5	15
61~100	1/4	AMV 125	210	190	170	5	185	190	55	10	13	25	45	28	7
	1/2	AMV 230	250	225	200	5	235	210	65	12	14	30	55	33	7
	1	AMV 235	280	255	230	5	265	245	70	13	15	35	60	38.5	10
	2	AMV 340	310	280	250	5	285	300	75	15	15	40	65	43.5	10
	3	AMV 345	350	320	290	5	325	321	80	15	15	45	70	48.5	12
	5	AMV 450	400	370	340	5	360	337	90	17	18	50	80	53.5	12
	7.5	AMV 460	450	410	380	5	370	356	95	18	18	60	85	63.5	15
110~180	1/4	AMV 230	250	225	200	5	235	190	65	12	14	30	55	33	7
	1/2	AMV 235	280	255	230	5	265	210	70	13	15	35	60	38.5	10
	1	AMV 340	310	280	250	5	285	245	75	15	15	40	65	43.5	10
	2	AMV 345	350	320	290	5	325	300	80	15	15	45	70	48.5	12
	3	AMV 450	400	370	340	5	360	321	90	17	18	50	80	53.5	12
	5	AMV 460	450	410	380	5	370	337	95	18	18	60	85	63.5	15
	7.5	AMV 570	510	460	420	5	450	356	110	20	21	70	100	74.5	18

齿轮减速机 GEAR SPEED REDUCERS

ADH 双轴卧式齿轮减速机/ADH Two Shafts Horizontal Gear Speed Reducers

型号说明
ADH - 345 - 5 - 60

ADH 卧式双轴型
出力轴 45mm
马力5HP 3.7Kw
减速比 1..60

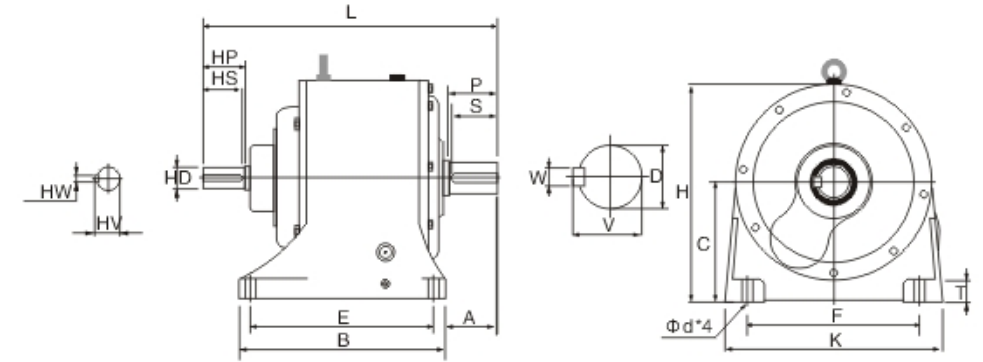

尺寸表 Size Table

单位: mm

速比	HP-4P	型号	A	B	C	E	F	H	K	L	T	d	低 速 轴(出 力)					高 速 轴(入 力)				
													D	P	S	V	W	HD	HP	HS	HV	HW
4~10	1/4-1/2	ADH 125	67	170	110	140	130	200	180	240	18	13	25	50	45	28	7	14	35	30	16	5
	1-2	ADH 230	85	200	120	170	150	225	200	325	21	14	30	60	55	33	7	19	45	40	21	5
	3	ADH 235	95	250	140	210	180	255	240	355	30	15	35	65	60	38.5	10	24	50	45	27	7
	5	ADH 340	106	265	155	225	215	305	270	370	25	15	40	70	65	43.5	10	24	50	45	31	7
	7.5	ADH 345	110	310	175	270	250	325	310	410	32	15	45	75	70	48.5	12	28	55	50	35.5	7
	10	ADH 450	135	350	205	300	270	390	350	460	36	18	50	85	80	53.5	12	32	60	55	35.5	10
	15	ADH 460	135	380	240	330	320	415	390	475	40	18	60	90	85	63.5	15	32	60	55	35.5	10
11~30	1/4-1/2	ADH 125	67	170	110	140	130	200	180	240	18	13	25	50	45	28	7	14	35	30	16	5
	1-2	ADH 230	85	200	120	170	150	225	200	325	21	15	30	60	55	33	7	19	45	40	21	5
	3	ADH 235	95	250	140	210	180	255	240	355	30	15	35	65	60	38.5	10	24	50	45	27	7
	5	ADH 340	106	265	155	225	215	305	270	370	25	15	40	70	65	43.5	10	24	50	45	31	7
	7.5	ADH 345	110	310	175	270	250	325	310	410	32	15	45	75	70	48.5	12	28	55	50	35.5	7
	10	ADH 450	135	350	205	300	270	390	350	460	36	18	50	85	80	53.5	12	32	60	55	35.5	10
	15	ADH 460	135	380	240	330	320	415	390	475	40	18	60	90	85	63.5	15	32	60	55	35.5	10
31~60	1/4-1/2	ADH 125	65	170	110	140	130	200	180	260	18	13	25	50	45	28	7	14	35	30	16	5
	1	ADH 230	80	200	120	170	150	225	200	350	21	15	30	60	55	33	7	19	45	40	21	5
	2	ADH 235	100	250	140	210	180	255	240	385	30	15	35	65	60	38.5	10	24	50	45	27	7
	3	ADH 340	102	265	155	225	215	305	270	405	25	15	40	70	65	43.5	10	24	50	45	31	7
	5	ADH 345	110	310	175	270	250	325	310	450	32	15	45	75	70	48.5	12	28	55	50	35.5	7
	7.5	ADH 450	131	350	205	300	270	390	350	500	36	18	50	85	80	53.5	12	32	60	55	35.5	10
	10	ADH 460	130	380	240	330	320	415	390	515	40	18	60	90	85	63.5	15	32	60	55	35.5	10
61~100	1/4	ADH 125	65	170	110	140	130	200	180	260	18	13	25	50	45	28	7	14	35	30	16	5
	1/2	ADH 230	80	200	120	170	150	225	200	350	21	15	30	60	55	33	7	19	45	40	21	5
	1	ADH 235	100	250	140	210	180	255	240	385	25	15	35	65	60	38.5	10	24	50	45	27	7
	2	ADH 340	102	265	155	225	215	305	270	405	25	15	40	70	65	43.5	10	24	50	45	31	7
	3	ADH 345	110	310	180	270	250	325	310	450	32	15	45	75	70	48.5	12	28	55	50	35.5	7
	5	ADH 450	131	350	205	300	270	390	350	500	36	18	50	85	80	53.5	12	32	60	55	35.5	10
	7.5	ADH 460	130	380	240	330	320	415	390	515	40	18	60	90	85	63.5	15	32	60	55	35.5	10
110~180	1/4	ADH 230	80	200	120	170	150	225	200	350	21	15	30	60	55	33	7	19	45	40	21	5
	1/2	ADH 235	100	250	140	210	180	255	240	385	25	15	35	65	60	38.5	10	24	50	45	27	7
	1	ADH 340	102	265	155	225	215	305	270	405	25	15	40	70	65	43.5	10	24	50	45	31	7
	2	ADH 345	110	310	180	270	250	325	310	450	32	15	45	75	70	48.5	12	28	55	50	35.5	7
	3	ADH 450	131	350	205	300	270	390	350	500	36	18	50	85	80	53.5	12	32	60	55	35.5	10
	5	ADH 460	130	380	240	330	320	415	390	515	40	18	60	90	85	63.5	15	32	60	55	35.5	10
	7.5	ADH 570	120	440	265	380	340	485	475	615	45	21	70	105	100	74.5	18	42	80	70	45.5	12

齿轮减速电机 GEAR SPEED REDUCERS



GH型: 卧式单相·三相齿轮减速马达/GH Type: Horizontal Gear Speed Reducers

HOW TO ORDER

GH-22-200-60-S-B

刹车<选用>BRAKE<Optional Function>

A:单相 110/220V,50/60HZ 1-Phase


S:三相 220/380V,50/60HZ 3-Phase

减速比:Gear Ratio 1:60

马力<W>:200 Watts 1/4HP

22:出力轴22mm

GH:卧式Horizontal Type

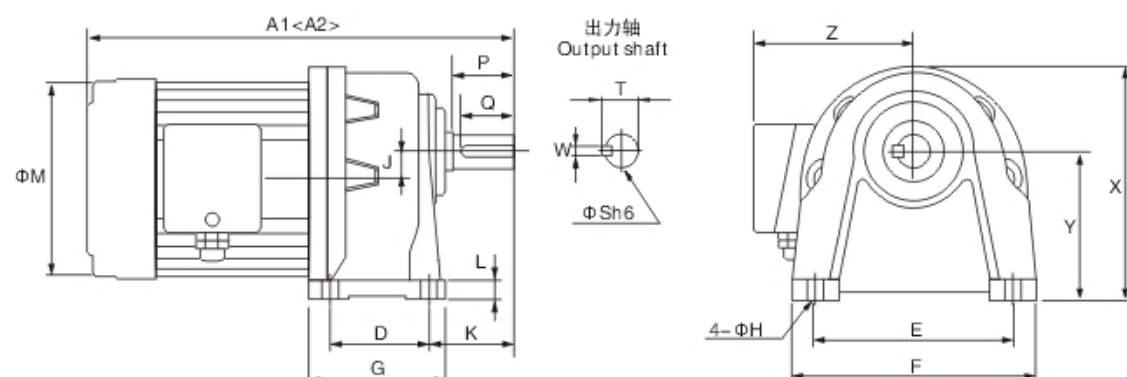

▼ 尺寸表(m/m) Size Table

马力 HP-4P	减速比 Gear Ratio	A1	A2	D	E	F	G	H	L	J	K	M	X	Y	Z	出力轴 Output shaft					重量 Kg
																P	Q	S	T	W	
75W (1/10HP)	3-200	265	265	40	110	135	65	9	10	16	48	127	132	88.5	105	30	25	18	20	5	5.2
	250-1800	355	355	65	130	163	90	11	15	18.2	56	127	152	97.5	105	40	35	22	25	7	6.8
100W (1/8HP)	3-50	255	275	40	110	135	65	9	10	16	48	127	132	88.5	105	30	25	18	20	5	5.3
	60-200	285	305	65	130	163	90	11	15	18.2	56	127	152	97.5	105	40	35	22	25	7	6.9
	250-1800	385	405	90	140	180	120	11	15	20.8	66	127	180	116	105	45	40	28	31	7	13
200W (1/4HP)	3-10	275	295	40	110	135	65	9	10	16	48	127	132	88.5	105	30	25	18	20	5	6.7
	15-90	307	327	65	130	163	90	11	15	18.2	56	127	152	97.5	105	40	35	22	25	7	8.6
	100-200	330	350	90	140	180	120	11	15	20.8	66	127	180	116	105	45	40	28	31	7	11
	250-1800	475	485	130	170	215	160	13	20	30.2	76	127	210	138.5	105	55	50	32	35.5	10	28
400W (1/2HP)	3-10	327	340	65	130	163	90	11	15	18.2	56	127	152	97.5	105	40	35	22	25	7	11
	15-90	357	370	90	140	180	120	11	15	20.8	66	127	180	116	105	45	40	28	31	7	14
	100-200	385	405	130	170	215	160	13	20	30.2	76	127	210	138.5	105	55	50	32	35.5	10	26
	250-1800	525	545	150	210	260	185	15	23	42.2	85	127	255	160	105	65	60	40	43.5	10	41
750W (1HP)	3-25	375	415	90	140	180	120	11	15	20.8	66	165	180	116	125	45	40	28	31	7	15
	30-120	410	435	130	170	215	160	13	20	30.2	75	165	210	138.5	125	55	50	32	35.5	10	28
	125-200	435	465	150	210	260	185	15	23	42.2	85	165	255	160	125	65	60	40	43.5	10	42
	250-1800	580	615	170	265	330	220	19	25	51.4	100	165	320	200	125	80	75	50	54	14	50
1500W (2HP)	3-25	440	480	130	170	215	160	13	20	30.2	76	190	210	138.5	145	55	50	32	35.5	10	34
	30-120	465	500	150	210	260	185	15	23	42.2	85	190	255	160	145	65	60	40	43.5	10	47
	125-180	515	555	170	265	330	220	19	25	51.4	100	190	320	200	145	80	75	50	54	14	52
2200W (3HP)	3-60	495		150	210	260	185	15	23	42.2	85	215	255	160	160	65	60	40	43.5	10	48
	70-120	530		170	265	330	220	19	25	51.4	100	215	320	200	160	80	75	50	54	14	55
3700W (5HP)	3-25	510		150	210	260	185	15	23	42.2	85	215	255	160	160	65	60	40	43.5	10	50
	30-80	545		170	265	330	220	19	25	51.4	100	215	320	200	160	80	75	50	54	14	57

备注:A1.三相马达尺寸 A1 3-Phase MOTOR, A2.单相马达尺寸 A2. 1-Phase MOTOR



齿轮减速电机 GEAR SPEED REDUCERS

GV型: 立式单相·三相齿轮减速马达/GV Type: Vertical Gear Speed Reducers

HOW TO ORDER

GV-22-200-60-S-B

刹车<选用>BRAKE<Optional Function>

A:单相 110/220V,50/60HZ 1-Phase


S:三相 220/380V,50/60HZ 3-Phase

减速比:Gear Ratio 1:60

马力<W>:200 Watts 1/4HP

22:出力轴22mm

GV:立式Vertical Type

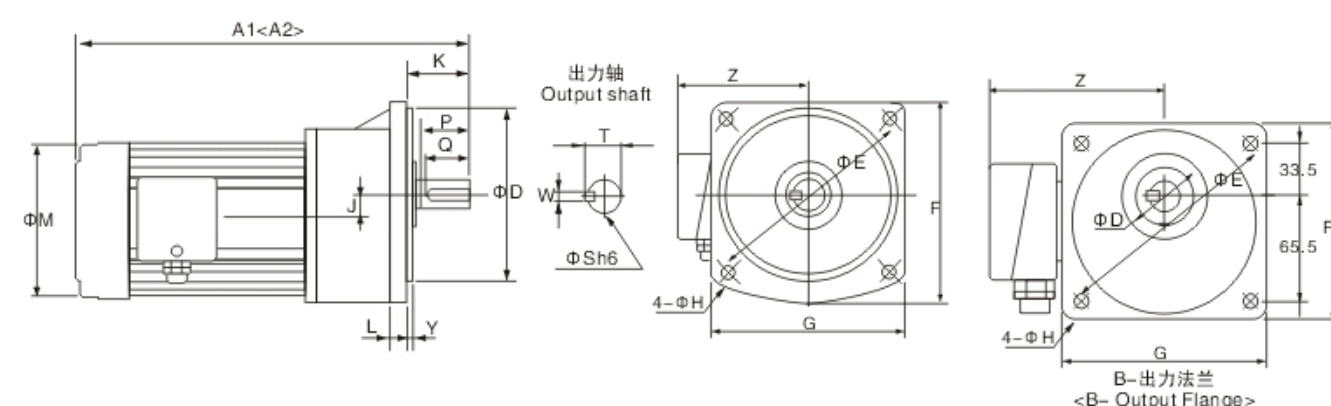

▼ 尺寸表(m/m) Size Table

马力 HP-4P	减速比 Gear Ratio	A1	A2	D	E	F	G	H	L	J	K	M	Y	Z	出力轴 Output shaft					重量 Kg
															P	Q	S	T	W	
75W (1/10HP)	3-200(B)	265	265	50	140	120	120	9	10	16	39	127	5	105	30	25	18	20	5	5.2
	250-1800	355	355	148	185	170	156	11	12	18.2	47	127	3.5	105	40	35	22	25	7	6.8
100W (1/8HP)	3-50(B)	255	275	50	140	120	120	9	10	16	39	127	5	105	30	25	18	20	5	5.3
	60-200	285	305	148	185	170	156	11	12	18.2	47	127	3.5	105	40	35	22	25	7	6.9
200W (1/4HP)	250-1800	385	405	170	220	195	180	11	13	20.8	54	127	4	105	45	40	28	31	7	13
	3-10(B)	275	295	50	140	120	120	9	10	16	39	127	5	105	30	25	18	20	5	6.7
	15-90	305	325	148	185	170	156	11	12	18.2	47	127	3.5	105	40	35	22	25	7	8.6
	100-200	330	350	170	220	195	180	11	13	20.8	54	127	4	105	45	40	28	31	7	11
400W (1/2HP)	250-1800	475	485	185	255	240	225	13	15	30.2	66	127	4	105	55	50	32	35.5	10	28
	3-10	325	340	148	185	170	156	11	12	18.2	47	127	3.5	105	40	35	22	25	7	11
	15-90	357	370	170	220	195	180	11	13	20.8	54	127	4	105	45	40	28	31	7	14
	100-200	385	405	185	255	240	225	13	15	30.2	66	127	4	105	55	50	32	35.5	10	26
750W (1HP)	250-1800	525	545	230	310	300	275	15	20	42.2	80	127	5	105	65	60	40	43.5	10	41
	3-25	375	415	170	220	195	180	11	13	20.8	54	165	4	125	45	40	28	31	7	15
	30-120	410	435	185	255	240	225	13	15	30.2	66	165	4	125	55	50	32	35.5	10	28
	125-200	435	465	230	310	300	275	15	20	42.2	80	165	5	125	65	60	40	43.5	10	42
1500W (2HP)	250-1800	580	615	280	390	360	320	19	20	51.4	89	165	5	125	80	75	50	54	14	50
	3-25	440	480	185	255	240	225	13	15	30.2	66	190	4	145	55	50	32	35.5	10	34
	30-120	465	500	230	310	300	275	15	20	42.2	80	190	5	145	65	60	40	43.5	10	47
2200W (3HP)	125-180	515	555	280	390	360	320	19	20	51.4	89	190	5	145	80	75	50	54	14	52
	3-60	495		230	310	300	275	15	20	42.2	80	215	5	160	65	60	40	43.5	10	48
3700W (5HP)	70-120	535		280	390	360	320	19	20	51.4	89	215	5	160	80	75	50	54	14	55
	3-25	510		230	310	300	275	15	20	42.2	80	215	5	160	65	60	40	43.5	10	50
	30-80	550		280	390	360	320	19	20	51.4	89	215	5	160	80	75	50	54	14	57

备注:A1.三相马达尺寸 A1 3-Phase MOTOR, A2.单相马达尺寸 A2. 1-Phase MOTOR

齿轮减速电机 GEAR SPEED REDUCERS



GHD型: 卧式双轴型齿轮减速机/Two Shafts Horizontal Gear Speed Reducers


HOW TO ORDER
GHD-22-200-90

减速比: Gear Ratio 1:90

马力<W>: 200 Watts 1/4HP

22: 出力轴22mm

GHD: 卧式双轴型 Two Shafts Horizontal Type

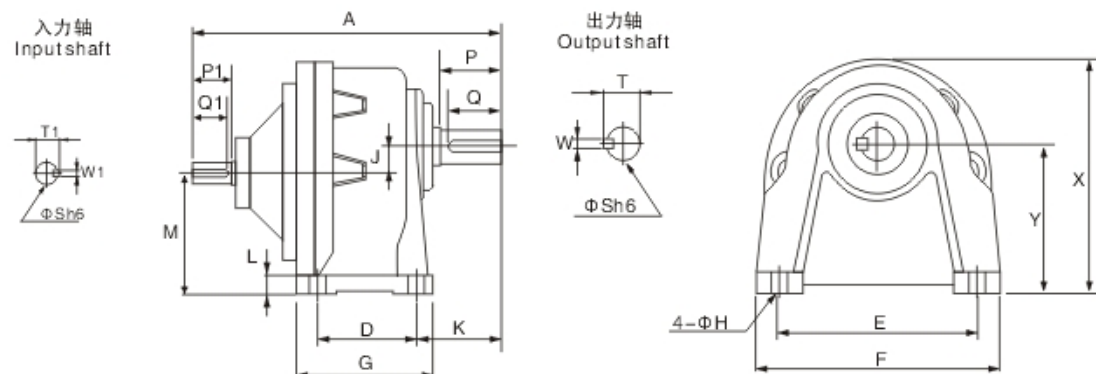

▼ 尺寸表(m/m) Size Table

马力 HP-4P	减速比 Gear Ratio	A	D	E	F	G	H	L	J	K	M	X	Y	出力轴 Output shaft					入力轴 Input					重量 Kg
														P	Q	S	T	W	P1	Q1	S1	T1	W1	
100W (1/8HP)	3-50	173	40	110	135	65	9	10	16	48	72.5	132	88.5	30	25	18	20	5	30	25	14	16	5	3
	60-200	207	65	130	160	90	11	15	18.2	56	79.3	152	97.5	40	35	22	25	7	30	25	14	16	5	4
200W (1/4HP)	3-10	173	40	110	135	65	9	10	16	48	72.5	132	88.5	30	25	18	20	5	30	25	14	16	5	3
	15-90	207	65	130	160	90	11	15	18.2	56	79.3	152	97.5	40	35	22	25	7	30	25	14	16	5	5
	100-200	263	90	140	180	120	11	15	20.8	66	95.2	180	116	45	40	28	31	7	30	25	14	16	5	7
400W (1/2HP)	3-10	207	65	130	160	90	11	15	18.2	56	79.3	152	97.5	40	35	22	25	7	30	25	14	16	5	6
	15-90	263	90	140	180	120	11	15	20.8	66	95.2	180	116	45	40	28	31	7	30	25	14	16	5	7
	100-200	300	130	170	215	160	13	20	30.2	76	108.3	210	138.5	55	50	32	35.5	10	30	25	14	16	5	19
750W (1HP)	3-25	269	90	140	180	120	11	15	20.8	66	95.2	180	116	45	40	28	31	7	40	35	19	21.5	6	7
	30-120	310	130	170	215	160	13	20	30.2	76	108.3	210	138.5	55	50	32	35.5	10	40	35	19	21.5	6	21
	125-200	336	150	210	260	185	15	23	42.2	85	117.8	255	160	65	60	40	43.5	10	40	35	19	21.5	6	35
1500W (2HP)	3-25	320	130	170	215	160	13	20	30.2	76	108.3	210	138.5	55	50	32	35.5	10	50	40	24	27.5	8	21
	30-120	350	150	210	260	185	15	23	42.2	85	117.8	255	160	65	60	40	43.5	10	50	40	24	27.5	8	35
2200W (3HP)	3-60	360	150	210	260	185	15	23	42.2	85	117.8	255	160	65	60	40	43.5	10	60	50	28	31	8	35
	70-120	410	170	265	330	220	19	25	51.4	100	148.6	320	200	80	75	50	54	14	60	50	28	31	8	43
3700W (5HP)	3-25	360	150	210	260	185	15	23	42.2	85	117.8	255	160	65	60	40	43.5	10	60	50	28	31	8	35
	30-80	410	170	265	330	220	19	25	51.4	100	148.6	320	200	80	75	50	54	14	60	50	28	31	8	43

齿轮减速电机 GEAR SPEED REDUCERS



GVD型: 立式双轴型齿轮减速机/Two Shafts Vertical Gear Speed Reducers


HOW TO ORDER
GVD-22-200-90

减速比: Gear Ratio 1:90

马力<W>: 200 Watts 1/4HP

22: 出力轴22mm

GVD: 立式双轴型 Two Shafts Horizontal Type

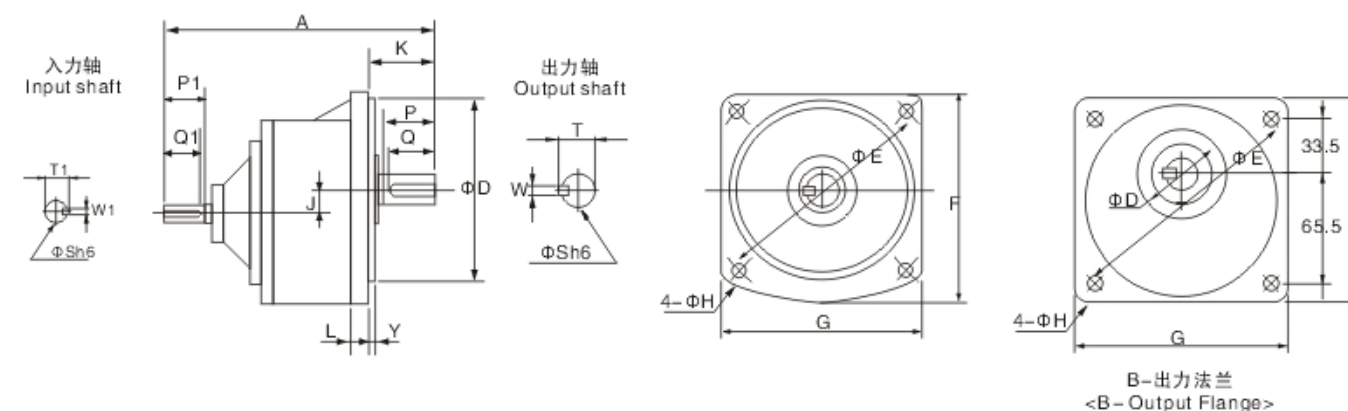

▼ 尺寸表(m/m) Size Table

马力 HP-4P	减速比 Gear Ratio	A	D	E	F	G	H	L	J	K	Y	出力轴 Output shaft					入力轴 Input					重量 Kg
												P	Q	S	T	W	P1	Q1	S1	T1	W1	
100W (1/8HP)	3-50(B)	173	50	140	120	120	9	10	16	39	5	30	25	18	20	5	30	25	14	16	5	3
	60-200	207	148	185	170	156	11	12	18.2	47	3.5	40	35	22	25	7	30	25	14	16	5	4
200W (1/4HP)	3-10(B)	173	50	140	120	120	9	10	16	39	5	30	25	18	20	5	30	25	14	16	5	3
	15-90	207	148	185	170	156	11	12	18.2	47	3.5	40	35	22	25	7	30	25	14	16	5	5
	100-200	263	170	220	195	180	11	13	20.8	54	4	45	40	28	31	7	30	25	14	16	5	7
400W (1/2HP)	3-10	207	148	185	170	156	11	12	18.2	47	3.5	40	35	22	25	7	30	25	14	16	5	6
	15-90	263	170	220	195	180	11	13	20.8	54	4	45	40	28	31	7	30	25	14	16	5	7
	100-200	300	185	255	240	225	13	15	30.2	66	4	55	50	32	35.5	10	30	25	14	16	5	19
750W (1HP)	3-25	268	170	220	195	180	11	13	20.8	54	4	45	40	28	31	7	40	35	19	21.5	6	7
	30-120	310	185	255	240	225	13	15	30.2	66	4	55	50	32	35.5	10	40	35	19	21.5	6	21
	125-200	336	230	310	300	275	15	20	42.2	80	5	65	60	40	43.5	10	40	35	19	21.5	6	35
1500W (2HP)	3-25	320	185	255	240	225	13	15	30.2	66	4	55	50	32	35.5	10	50	40	24	27.5	8	21
	30-120	350	230	310	300	275	15	20	42.2	80	5	65	60	40	43.5	10	50	40	24	27.5	8	35
2200W (3HP)	3-60	360	230	310	300	275	15	20	42.2	80	5	65	60	40	43.5	10	60	50	28	31	8	35
	70-120	400	280	390	360	320	19	20	51.4	89	5	80	75	50	54	14	60	50	28	31	8	43
3700W (5HP)	3-25	360	230	310	300	275	15	20	42.2	80	5	65	60	40	43.5	10	60	50	28	31	8	35
	30-80	400	280	390	360	320	19	20	51.4	89	5	80	75	50	54	14	60	50	28	31	8	43


HOW TO ORDER GHM-22-200-90

减速比: Gear Ratio 1:90

马力<W>: 200 Watts 1/4HP

22: 出力轴22mm

GHM: 卧式直结型 Motor Mount Horizontal Type

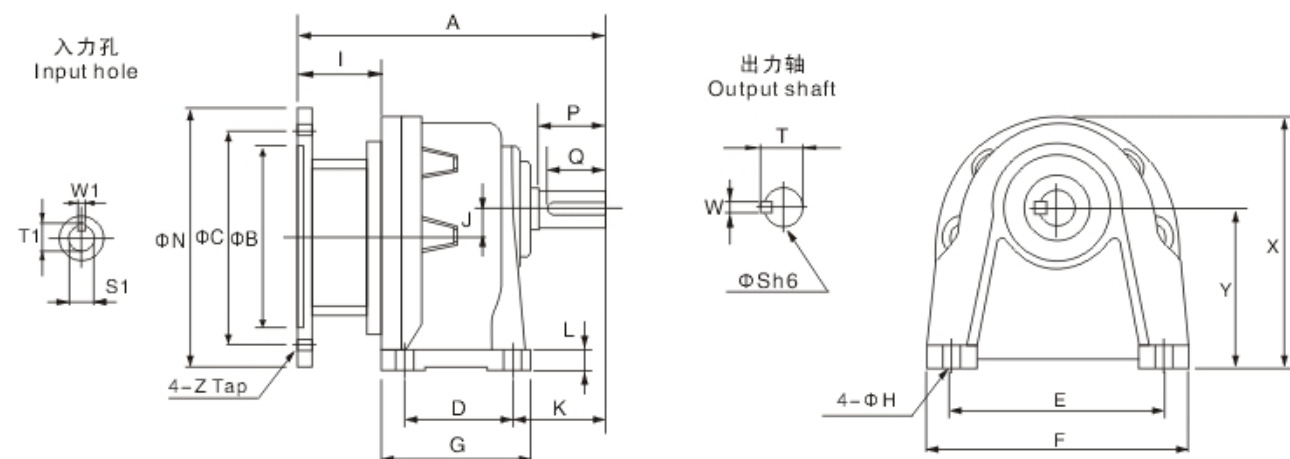

▼ 尺寸表(m/m) Size Table

马力 HP-4P	减速比 Gear Ratio	A	D	E	F	G	H	L	J	K	X	Y	B	C	N	Z	I	出力轴 Output shaft					入力孔 Input			重量 Kg
																		P	Q	S	T	W	S1	T1	W1	
200W (1/4HP)	3-10	153	40	110	135	65	9	10	16	48	132	88.5	110	130	158	8	52.5	30	25	18	20	5	11	13	4	4
	15-90	188	65	130	160	90	11	15	18.2	56	152	97.5	110	130	158	8	52.5	40	35	22	25	7	11	13	4	6
	100-200	216	90	140	180	120	11	15	20.8	66	180	116	110	130	158	8	52.5	45	40	28	31	7	11	13	4	8
400W (1/2HP)	3-10	188	65	130	160	90	11	15	18.2	56	152	97.5	110	130	158	8	52.5	40	35	22	25	7	14	16.5	5	6
	15-90	216	90	140	180	120	11	15	20.8	66	180	116	110	130	158	8	52.5	45	40	28	32	7	14	16.5	5	8
	100-200	250	130	170	215	160	13	20	30.2	76	210	138.5	110	130	158	8	52.5	55	50	32	35.5	10	14	16.5	5	21
750W (1HP)	3-25	240	90	140	180	120	11	15	20.8	66	180	116	130	165	198	10	78	45	40	28	31	7	19	21.5	6	11
	30-120	275	130	170	215	160	13	20	30.2	76	210	138.5	130	165	198	10	78	55	50	32	35.5	10	19	21.5	6	26
	125-200	303	150	210	260	185	15	23	42.2	85	255	160	130	165	198	10	78	65	60	40	43.5	10	19	21.5	6	38
1500W (2HP)	3-25	275	130	170	215	160	13	20	30.2	76	210	138.5	130	165	198	10	78	55	50	32	35.5	10	24	27	8	26
	30-120	303	150	210	260	185	15	23	42.2	85	255	160	130	165	198	10	78	65	60	40	43.5	10	24	27	8	39
2200W (3HP)	3-60	320	150	210	260	185	15	23	42.2	85	255	160	180	215	250	12	95	65	60	40	43.5	10	28	31	8	40
	70-120	363	170	265	330	220	19	25	51.4	100	320	200	180	215	250	12	95	80	75	50	54	14	28	31	8	45
3700W (5HP)	3-25	320	150	210	260	185	15	23	42.2	85	255	160	180	215	250	12	95	65	60	40	43.5	10	28	31	8	50
	30-80	363	170	265	330	220	19	25	51.4	100	320	200	180	215	250	12	95	80	75	50	54	14	28	31	8	55


HOW TO ORDER GVM-22-200-90

减速比: Gear Ratio 1:90

马力<W>: 200 Watts 1/4HP

22: 出力轴22mm

GVM: 立式直结型 Motor Mount Horizontal Type

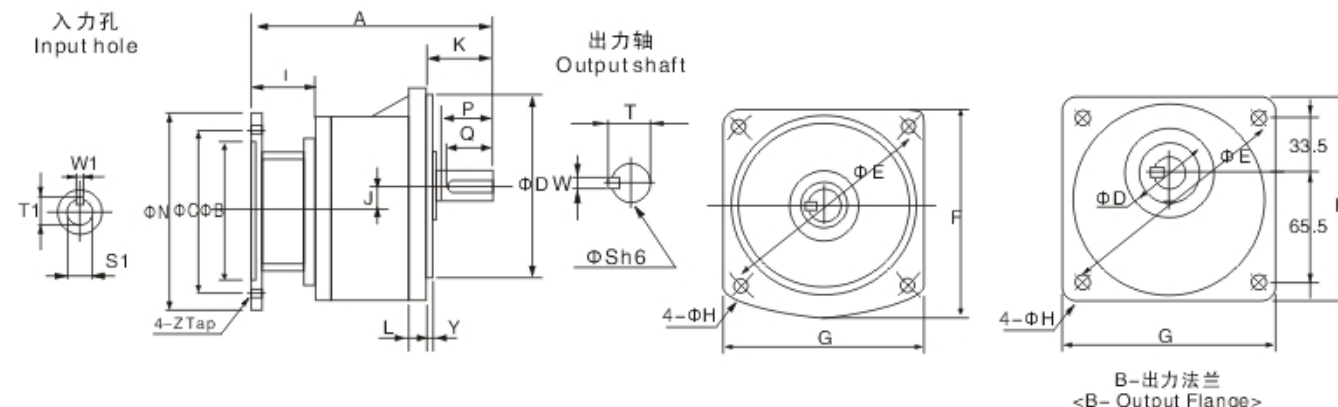

▼ 尺寸表(m/m) Size Table

马力 HP-4P	减速比 Gear Ratio	A	D	E	F	G	H	L	J	K	Y	B	C	N	Z	I	出力轴 Output shaft					入力孔 Input			重量 Kg
																	P	Q	S	T	W	S1	T1	W1	
200W (1/4HP)	3-10(B)	153	50	140	120	120	9	10	16	39	5	110	130	158	8	52.5	30	25	18	20	5	11	13	4	4
	15-90	188	148	185	170	156	11	12	18.2	47	3.5	110	130	158	8	52.5	40	35	22	25	7	11	13	4	6
	100-200	216	170	220	195	180	11	13	20.8	54	4	110	130	158	8	52.5	45	40	28	31	7	11	13	4	8
400W (1/2HP)	3-10	188	148	185	170	156	11	12	18.2	47	3.5	110	130	158	8	52.5	40	35	22	25	7	14	16.5	5	6
	15-90	216	170	220	195	180	11	13	20.8	54	4	110	130	158	8	52.5	45	40	28	32	7	14	16.5	5	8
	100-200	250	185	255	240	225	13	15	30.2	66	4	110	130	158	8	52.5	55	50	32	35.5	10	14	16.5	5	21
750W (1HP)	3-25	240	170	220	195	180	11	13	20.8	54	4	130	165	198	10	78	45	40	28	31	7	19	21.5	6	11
	30-120	275	185	255	240	225	13	15	30.2	66	4	130	165	198	10	78	55	50	32	35.5	10	19	21.5	6	26
	125-200	305	230	310	300	275	15	20	42.2	80	5	130	165	198	10	78	65	60	40	43.5	10	19	21.5	6	38
1500W (2HP)	3-25	275	185	255	240	225	13	15	30.2	66	4	130	165	198	10	78	55	50	32	35.5	10	24	27	8	26
	30-120	305	230	310	300	275	15	20	42.2	80	5	130	165	198	10	78	65	60	40	43.5	10	24	27	8	39
2200W (3HP)	3-60	320	230	310	300	275	15	20	42.2	80	5	180	215	250	12	95	65	60	40	43.5	10	28	31	8	39
	70-120	365	280	390	360	320	19	20	51.4	89	5	180	215	250	12	95	80	75	50	54	14	28	31	8	44
3700W (5HP)	3-25	320	230	310	300	275	15	20	42.2	80	5	180	215	250	12	95	65	60	40	43.5	10	28	31	8	55
	30-80	365	280	390	360	320	19	20	51.4	89	5	180	215	250	12	95	80	75	50	54	14	28	31	8	60